



1x TECHNISEAL® APPLICATIONS:

- UL/CUL Listed Wet Location
- Cleanroom (Classes 100-100,000; ISO Classes 5-9)
- UL/CUL Hazardous Location (Class I, Division 2; Groups A, B, C & D; Class II, Division 2; Groups F & G)
- NSF Certified Food Processing (Splash Zone, Food Zone)
- Industrial & Commercial
- Transit

BENEFITS:

- Luminaires adaptable to your specific needs

FEATURES:

- Available with **IP 65 rating**, add -IP65 suffix (requires stainless steel lens frame)
- Premium electronic ballast standard
- Available in stainless steel construction
- Every luminaire tested with lamps to assure customer satisfaction
- 5 year limited warranty
- Proudly made in **USA**

SPECIFICATIONS:

HOUSING:

Constructed of nominal 20GA (.036) zinc coated steel for unmatched corrosion protection. Two welded, tapered, threaded hubs on the ends provide a sealed wireway access. All seams are sealed with a long life acrylic sealant.

Food Zone: All external metal components of stainless steel (S3 option std).

REFLECTOR:

Fabricated of zinc coated steel, painted with a minimum reflectance of 88%.

LENS FRAME:

Exclusively designed, heavy duty, extruded, anodized aluminum with stainless steel captive screws used to hold the lens frame tight to the housing. The frame is supported by two cables while servicing.

Food Zone: All external metal components of stainless steel (S3 option std).

GASKETING:

An extruded, ribbed vinyl gasket seals the lens into the frame; with our exclusive, mechanically held, extruded, silicone gasket used to seal the frame to the housing.

Food Zone: Silicone sealant is used to seal the lens into the frame, with EPDM sealing the frame to the housing.

FINISH:

Painted surfaces are two mil white polyester enamel, special colors available.

LENS:

.140 extruded prismatic acrylic with 50% DR content for durability, smooth side out.

Food Zone: .156 extruded prismatic polycarbonate, smooth side out.

ELECTRICAL:

All ballasts and lampholders are UL Listed.




MOUNTING:

Surface or custom detail available for covered ceiling installations.

TEMPERATURE CODE:

Class I, Div. 2= T5 (100°C); Class II, Div. 2= T5 (100°C)

(No fixture surface exposed to the hazardous atmosphere will exceed this temperature. Based on 40°C (104°F) ambient.)

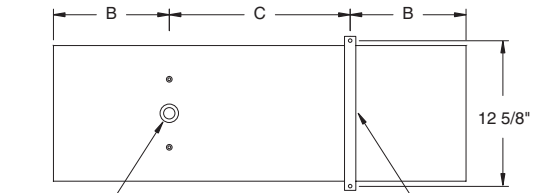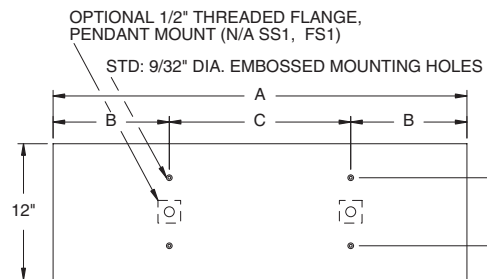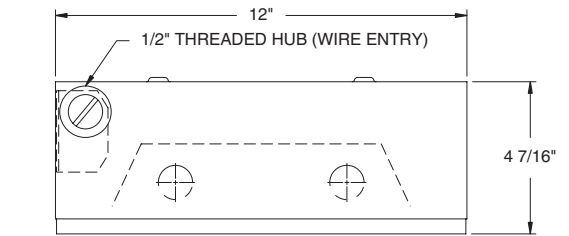


HAZARDOUS LOCATION: OPTIONAL 1/2" THREADED HUB (PENDANT MOUNT)


OPTIONAL MOUNTING STRAP W/ 5/16" DIA. MTG. HOLES

LENGTH	DIMENSIONS IN INCHES		
	A	B	C
1 FT	12 1/2	4 1/4	4
2 FT	24 1/2	4 1/4	16
3 FT	36 1/2	10 1/4	16
4 FT	48 1/2	8 1/4	32
6 FT	72 1/2	12 1/4	48
8 FT	96 1/2	16 1/4	64


LENS FRAME DETAILS:




ALUMINUM LENS FRAME DETAIL




STAINLESS STEEL LENS FRAME DETAIL



HAZ. LOC. STAINLESS STEEL LENS FRAME DETAIL




SPLASH ZONE LENS FRAME DETAIL



FOOD ZONE LENS FRAME DETAIL

PHOTOMETRICS: For additional photometry, go to paramountlighting.com

Model S12324-R5, 4FT, Specular Reflector and Prismatic Acrylic Lens, 2 32W T8 Lamps, Lamp Lumen Rating = 3050

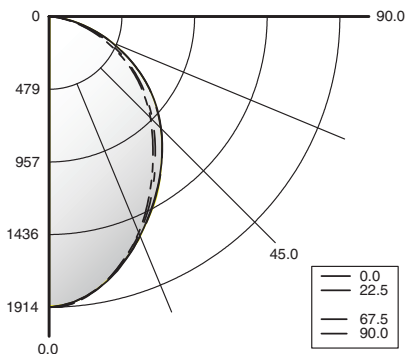

Coefficients of Utilization, Zonal Cavity Method

Floor Cavity Reflectance: 20%

RC	.8				.7				.5				.3				.1				0								
	RW	.7	.5	.3	.1	.7	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3
R 0	85	85	85	85	83	83	83	83	79	79	79	75	75	75	72	72	72	71											
C 1	78	75	72	69	76	73	70	68	70	68	66	67	65	64	65	63	62	61											
R 2	71	65	61	57	69	64	60	56	62	58	55	59	56	54	57	55	52	51											
3	65	58	52	48	63	57	51	47	55	50	46	53	49	46	51	48	45	43											
4	60	51	45	41	58	50	45	40	49	44	40	47	43	39	45	42	39	37											
5	55	46	40	35	53	45	39	35	44	39	35	42	38	34	41	37	34	32											
6	51	42	35	31	49	41	35	31	40	34	31	38	34	30	37	33	30	29											
7	47	38	32	27	46	37	31	27	36	31	27	35	30	27	34	30	27	25											
8	44	35	29	25	43	34	28	25	33	28	24	32	28	24	31	27	24	23											
9	41	32	26	22	40	31	26	22	31	26	22	30	25	22	29	25	22	21											
10	39	29	24	20	38	29	24	20	28	23	20	28	23	20	27	23	20	19											

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1350	22.1	31
0-40	2128	34.9	48.9
0-60	3571	58.5	82.1
0-90	4348	71.3	100
90-120	0	0	0
90-130	0	0	0
90-150	0	0	0
90-180	0	0	0
0-180	4348	71.3	100

Total Luminaire Optical Efficiency = 71.3%
Spacing Criterion: 0° = 1.09, 90° = 1.05

1x TECHNISEAL® SURFACE TROFFER ORDERING INFORMATION:

SERIES	LAMP QTY	LAMP TYPE	LENS	OPT MATERIAL	OPTIONS	VOLTAGE
S1 Wet Location Cleanroom	1*		2 .125 Clear Acrylic (No Pattern)		EM2 Bodine BDL700 WET/IOTA I-48-DL WET or similar	120V-277V/60Hz STD 347V/60Hz
HS1* Hazardous	2* Standard		3 .125 White Acrylic		EM3 Bodine B50/IOTA I-320-DL or similar	
SS1 Splash Zone	3*		4 .140 Prismatic Acrylic (P12) (base)		EM4 Bodine BDL900 WET/IOTA I-40-DL WET or similar	50Hz & Other Voltages Available
FS1 Food Zone	T2 Tandem		6 .125 Clear Polycarbonate (No Pattern)		EM8 Bodine BHD65U T8 HAZ. LOC.	
	T4 2 Tandem		7 .125 White Polycarbonate		BALLASTS (SPECIFY VOLTAGE)	
	T6 3 Tandem		8 .156 Prismatic Polycarbonate (P12)		D1 Lutron Dimming ECO-10	
			9 .187 Tempered Glass (P62)		D2 Electronic Dimming	
			LENSES AVAILABLE FOR FOOD ZONE		D4 < 10% THD (Consult Factory)	
			6 .125 Clear Polycarbonate (No Pattern)		E0 Low-Temp Electronic (N/A T12 RS & VHO)	
			7 .125 White Polycarbonate		E2 2 Electronic Ballasts	
			8 .156 Prismatic Polycarbonate (P12) (base)		E9 Rapid Start Electronic Ballast	
			9 .187 Tempered Glass (P62)		FUSING	
18BX F18T5TT (13") 0°			*S2 Stainless Steel Housing		F1 GLR/HLR Fusing (Fast)	
26QD 26W G24Q 4PIN (1FT) 0°			*S3 Stainless Steel Exterior		F2 GMF/HLR Fusing (Slow)	
40BX F40T5TT (2FT) 0°			*S5 Stainless Steel Lens Frame Only		LENSING	
50BX F50T5TT (2FT) 0°			* Note:		WET/HAZ	
14T5 36W G24Q 4PIN (2FT) 0°			If Stainless Steel is ordered,		H0 Special Lens (Specify)	MOUNTING
17* F17T8 (2FT) 0°			304 SS Standard, 316		H2 .150 Extra Heavy Clear Acrylic	M0 Marine Mounting Straps
24T5H F24T5/HO (2FT) 0°			SS and other materials		H3 .150 Extra Heavy White Acrylic	M1 Pendant Mount (Pendants By Others)
25* F25T8 (3FT) 0°			available, consult agent.		H5 .156 C73 Tempered Glass	M2 Mounting Bracket Kit (Surface / Chain)
28T5 F28T5 (4FT) 0°					H6 .187 Clear Tempered Glass	MISC
31U* FB31T8/U 1 5/8" (2FT) 0°					J0 Lamp Sleeves (Specify Color)	IP65 IP rated (-S5 option required)
31U6* FB31T8/U 6" (2FT) 0°					J2 .060 Clear Acrylic Overlay	P9 Special Paint Color (Provide Paint Code & Chip)
32* F32T8 (4FT) 0°					J4 .020 White Acrylic Overlay (Lamp Side)	R5 Specular Aluminum Reflector
48H F48T12/HO (4FT) -20°					J6 .080 Clear Polycarbonate Overlay	S1 Special Material (Consult Agent)
48T8H F48T8/HO (4FT) -20°					J7 Louver (Specify)	T3 Tamper Resistant (Hex w/pin STD, Others Avail)
54T5H F54T5/HO (4FT) -20°					J9 RFI Lens (Specify Pattern)	VI External Gasketing
72H F72T12/HO (6FT) -20°					K3 .187 KSH-12 Acri-Tuf Acrylic	V3 No Silicone Sealant Used
72HT8H F72T8/HO (6FT) -20°					K6 External Prisms	W4 Inboard Outboard Wiring (Dual Switching)
96H F96T12/HO (8FT) -20°					LENSING FOOD ZONE ONLY	W5 Rear Wire Entry
96T8 F96T8 (59W) 50°					H5 .156 C73 Tempered Glass	Y5 RFI Suppressors
96T8H F96T8/HO (8FT) -20°					H6 .187 Clear Tempered Glass	
					J0 Lamp Sleeves (Specify Color)	
					J4 .020 White Acrylic Overlay (Lamp Side)	
					J6 .080 Clear Polycarbonate Overlay	

* Lamp Type Available for Hazardous Location.
Certain Lamps Require 6" Deep Housing

Other Wattages and Lengths Available, Consult Factory.

NSF Food Processing Note:

Food Zone (F prefix) luminaires come in DIRECT CONTACT with food.
Splash Zone (S prefix) units may become soiled, but are outside the danger of recontamination.

Information subject to change without notice. Lamps supplied by others.

© 2010 Paramount Industries, Inc. P.O. Box 259 Croswell, MI 48422

Hazardous Location: Food Processing:

Project Information: