VRSW7, Stairwell Light — INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE LUMINAIRE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.

DETAILED ILLUSTRATION

PARAMOUNT INDUSTRIAL LIGHTING

www.paramountlighting.com
3609 Swenson Ave.
St. Charles, IL 60174

GENERAL:

1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
4. These luminaires are intended to be mounted to a J-Box directly supported by the building structure.
5. All luminaires to be installed by a qualified electrician.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

INSTALLATION:

1. Attach baseplate to J-Box (Checking for level position). Orient "TOP" upwards. Affix the luminaire to the wall using the four mounting holes on the plate (**Figure 1**).
2. Attach wires from power source into luminaire.

IMPORTANT: Make sure all connections follow code requirements.

3. Locate the hooks on the bottom of the baseplate. Place them into the slots on the backside of the top cover (**Figure 2**).
4. Attach the safety carabiner from the top-cover to the baseplate (**Figure 3**).
5. Connect wires from power source to top-cover.
6. Gently rotate the top cover into position with the baseplate, so that the two holes at the top align.
7. Fasten the Locking Screw into place (**Figure 4**).

IMPORTANT: All Paramount products can be cleaned with non-abrasive and chemical free agents. Use a soft cloth with mild detergent on exterior only.

Baseplate Dimensions

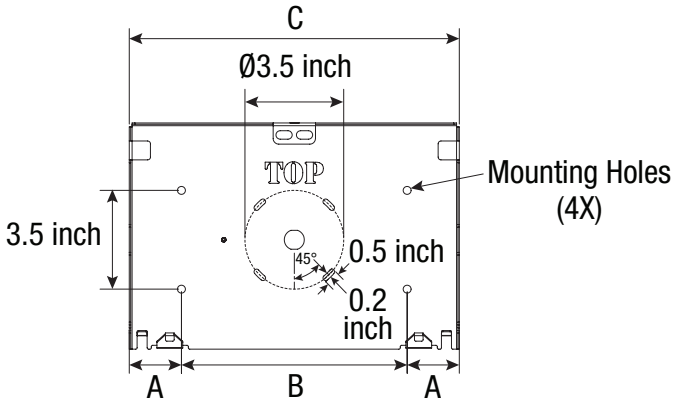

Length	Weight	Dimensions		
		A	B	C
1 FT	6.1 lbs	2.1 inch	8 inch	12 inch
2 FT	8.8 lbs	3.9 inch	16 inch	23.75 inch
3 FT	11.7 lbs	9.8 inch	16 inch	35.5 inch
4 FT	14.5 lbs	7.7 inch	32 inch	47.4 inch

VRSW7 Luminaire

Figure 1



Figure 2



Hook the baseplate into the top cover slots

Figure 3

Attach the safety carabiner from top cover to baseplate





Fasten Locking Screw

Figure 4

© PARAMOUNT LIGHTING. THIS DOCUMENT IS PROPRIETARY TO PARAMOUNT LIGHTING. ANY UNAUTHORIZED TRANSFER, USE OR REPRODUCTION IS STRICTLY PROHIBITED. IMPROPER INSTALLATION OR MAINTENANCE OF LUMINAIRES WILL VOID WARRANTY.