




GENERAL:

1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
4. All luminaires to be installed by a qualified electrician.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

INSTALLATION

1. Fixtures are packed with a plastic strip between the lens and the housing to assist in lens removal. While holding the fixture housing, grab both ends of the plastic strap and pull up to remove the lens. Discard plastic strap.
2. Set lens aside until installation is complete. If removal of lens is necessary after installation, lightly pry lens away from housing starting at one end.
3. Remove LED mounting plate by removing screws and disconnecting arrays from driver.
4. Mount luminaire utilizing 2 mounting holes. Luminaire can be direct surface mounted to ceiling or suspended.
5. Make all necessary wiring connections. Refer to wiring diagram on driver for proper connection.
6. Re-connect arrays to driver, attach LED mounting plate and replace lens.

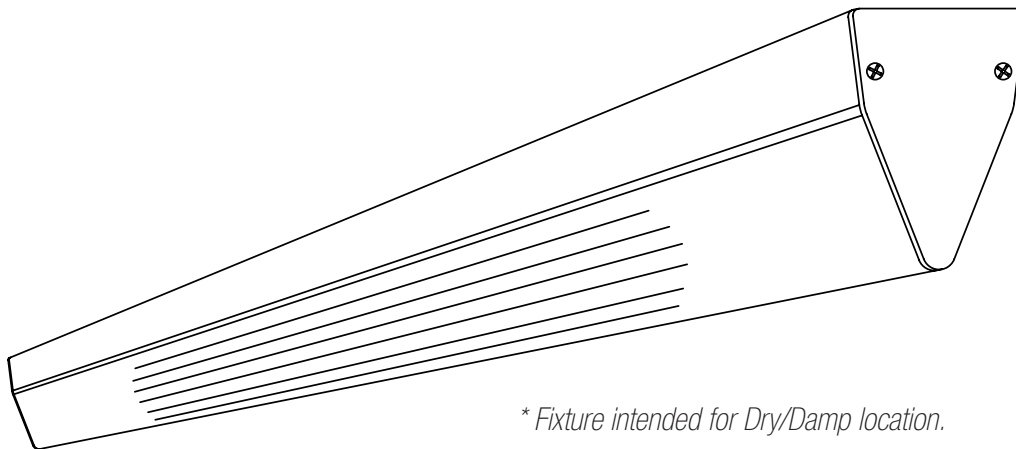

** Fixture intended for Dry/Damp location.*

Cleaning Instructions: Wipe luminaire with a soft cloth slightly dampened with warm, soapy water. On stainless steel units, tightly adhering deposits may be removed by using a stainless steel polishing powder. Never use steel wool or steel brushes on stainless steel. Always rub in the direction of the polish lines.

Mounting and electrical hardware not supplied by Paramount Industries unless otherwise noted.

iiPMA9