

## A9 Series

### Surface Mount



Made in USA with domestic & globally sourced components

#### APPLICATIONS:

- ETL/cETL Listed Dry Location
- Cleanroom  
(Classes 10-100,000; ISO Classes 4-9)
- Industrial & Commercial

#### FEATURES:

- Luminaires adaptable to your specific needs
- Premium Driver with Dimming standard
- Every luminaire tested to assure customer satisfaction
- 5 year limited warranty
- Proudly made in USA

### SPECIFICATIONS

#### HOUSING:

Constructed of heavy duty extruded, anodized aluminum. Wireway access can be provided in the top (W5 option).

#### END CAPS:

Die formed of anodized aluminum. Knock outs are provided in each end cap as standard for wireway access, or top of housing (W5 option).

#### LENS:


Extruded from a proprietary impact modified acrylic blend, specially formulated to minimize hot spots and provide maximum light transmission. This lens features a smooth exterior and utilizes light controlling longitudinal prisms that direct light output into the room, provides UV filtering, and reduces glare. This high performing lens is the ideal solution for modern LED technology.

#### ELECTRICAL:


High efficiency LED/Driver combination delivers 160 Lm/W raw array efficacy with 80+ CRI. 4000K color temperature is standard with options for 2700, 3000, 3500 and 5000K. 0-10V dimming comes standard with other control options available. THD <10%@120V, <15%@277V, PF> .95.

#### MOUNTING:

Designed for HEPA filter grid ceiling; surface, surface in-row, cable, or pendant options available.

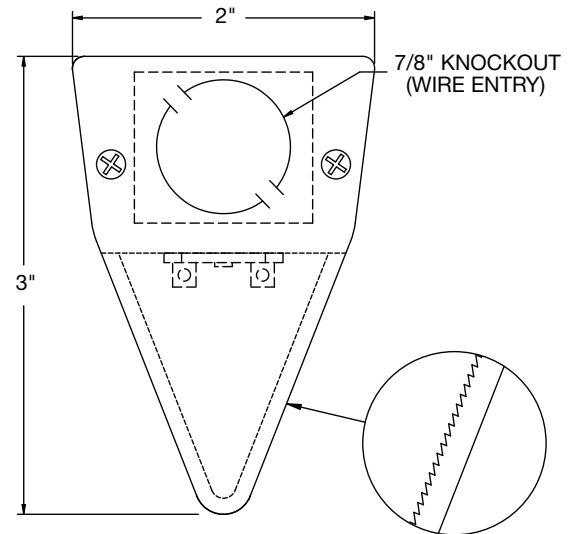


LIGHT CONTROL LENS

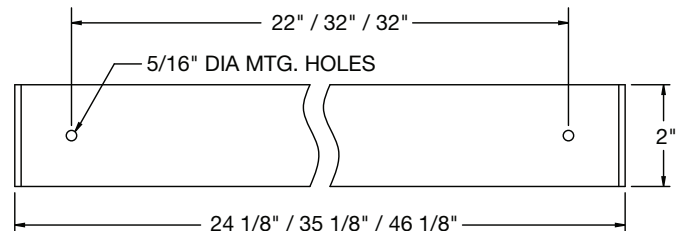

#### LENGTH WEIGHT

(ft)	(lbs)
2	3
3	4
4	5

### FEATURES | OPTIONS

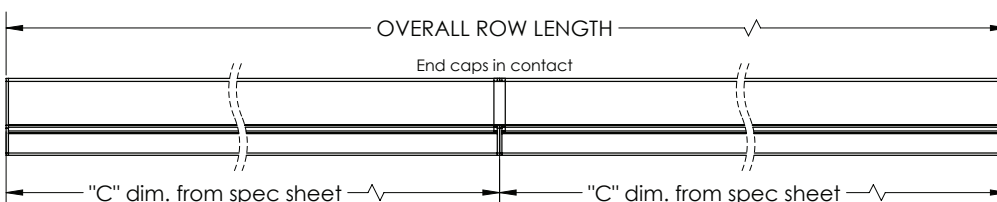

DB-DH-82521

Due to continuous development and improvements, specifications are subject to change without notice. Paramount reserves the right to change lab test details or specifications without notice. Product use certifies agreement to Paramount terms and conditions.



US Lighting Manufacturer Since 1947

# A9 Series

## PRODUCT CODE

SERIES	LENGTH	MOUNTING	VOLTAGE	CCT	CRI	LUMENS	FINISH	LENS	DIMMING	OPTIONS
<b>PMA9</b> Dry Location	<b>2</b> 2 FT <b>3</b> 3 FT <b>4</b> 4 FT	<b>SF</b> Surface <b>CM</b> Cable Mount (by other) <b>PM</b> Pendant (by other)	<b>UNV</b> 120-277V	<b>27K</b> 2700K <b>3K</b> 3000K <b>35K</b> 3500K <b>4K</b> 4000K <b>5K</b> 5000K	<b>CRI83</b> 83 CRI <b>CRI90</b> 90 CRI	<b>2 FT</b> <b>17L</b> 1685 lm (14W) <b>3 FT</b> <b>25L</b> 2527 lm (21W) <b>4 FT</b> <b>34L</b> 3368 lm (28W)	<b>AA</b> Anodized Alum <b>CC</b> Custom Color	<b>LA</b> Light Control Acrylic	<b>LD</b> Dimming 0-10V	<b>F1</b> GLR/HLR Fusing (Fast) <b>F2</b> GMF/HLR Fusing (Slow) <b>M3</b> In-Row (Surface Mount Only) <b>W5*</b> Rear Wire Entry

3 = Consult Factory

**SS NOTE:** If Stainless Steel is ordered, 304 SS Standard, 316 SS and other materials available, consult agent. Additional information regarding applications and proper Stainless Steel selection found in technical section of web site.

**LUMEN OUTPUT:** All listed lumen values are nominal. Lens transmission and fixture efficiency affect overall lumens.

**INDIVIDUAL UNITS STANDARD**

**NOT ALL COMBINATIONS POSSIBLE**

DB-DH-82521