

G2RD Series — Vivarium Red, Dual Circuit

Grid Techniseal Troffer

Grid Mount



APPLICATIONS:

- Cleanroom (Classes 100-100,000; ISO Classes 5-9)
- Food Processing (NSF Certified Splash Zone, Food Zone)
- Industrial & Commercial
- Transit & Municipal
- Wet Location (ETL/cETL Listed)
- Pharmaceutical
- Biology
- Vivarium
- Laboratory

FEATURES:

- 632 nm Red and White LEDs with dual circuit function
- Available with IP 65 rating, add -IP65 suffix (requires stainless steel lens frame & trim frame)
- L70 ≥ 132,500 hours
- Available in Stainless Steel construction
- Premium Driver with Dimming standard
- Type IC
- Every luminaire tested to assure customer satisfaction
- 5-Year limited warranty

SPECIFICATIONS

HOUSING:

Constructed of nominal 20GA (0.036) zinc coated steel for unmatched corrosion protection. Two welded, tapered, threaded flanges on the top provide a sealed wireway access. All seams are sealed with a long life acrylic sealant.

FINISH:

Painted surfaces are two mil white polyester enamel, special colors available.

LENS:

0.125 StarFrost Acrylic with 50% DR content for durability, smooth side out. See Ordering Information for other high quality lens options.

LENS FRAME:

Exclusively designed, heavy duty, extruded, anodized aluminum with stainless steel captive screws used to hold the lens frame tight to the housing. The frame is hinged for support while servicing.

Food Zone: All external metal components of stainless steel (S3 option std).

REFLECTOR:

Fabricated of aluminum, painted with a minimum reflectance of 88%.

GASKETING:

An extruded, ribbed vinyl gasket seals the lens into the frame; with our exclusive, mechanically held, extruded, silicone gasket used to seal the frame to the housing.



Food Zone: Silicone sealant is used to seal the lens into the frame, with extruded EPDM sealing the frame to the housing.

ELECTRICAL:

High efficiency LED/Driver combination delivers white and red light output suitable for animal research and other applications. 0-10V dimming comes standard with other control options available. THD <10%@120V, <15%@277V, PF> 0.95.


MOUNTING:

Grid or custom detail available.

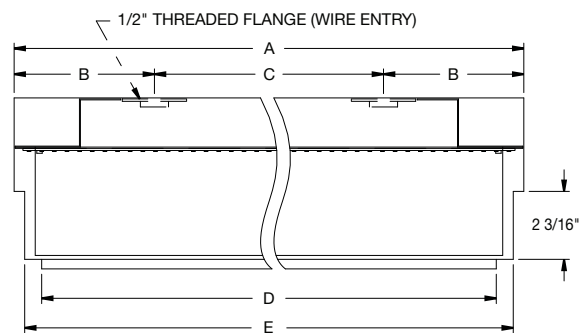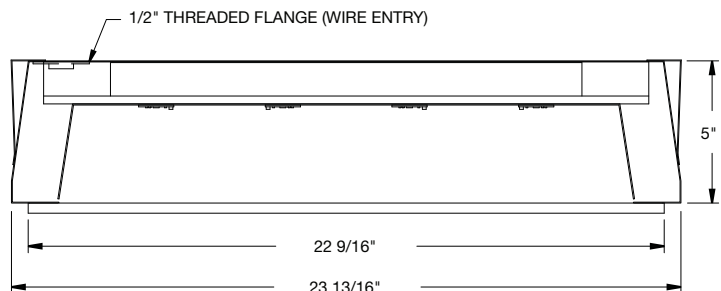


LENGTH (ft)	WEIGHT (lbs)	DIMENSIONS IN INCHES				
		A	B	C	D	E
2	22	23 29/32	5 11/32	13 1/4	22 9/16	23 21/32
4	38	47 29/32	4 31/32	38	46 1/2	47 21/32


LENS FRAME DETAILS




ALUMINUM
LENS FRAME DETAIL



STAINLESS STEEL
LENS FRAME DETAIL



SPLASH ZONE
LENS FRAME DETAIL



FOOD ZONE
LENS FRAME DETAIL

JC-TD-120425

Due to continuous development and improvements, specifications are subject to change without notice.

PRODUCT ORDERING CODEFootnotes:⁶ Only Available with White Painted Zinc Steel Finish

JC-TD-120425

© Paramount Lighting • 3625 Swenson Ave • St. Charles, IL 60174 • 800-521-5405 • www.paramountlighting.com

G2RD Series — NSF Food Zone Location

PRODUCT ORDERING CODE

SERIES	LENGTH	MOUNTING	VOLTAGE	CCT	CRI	LUMENS	COLOR	LUMENS	FINISH	LENS	DIMMING	OPTIONS
PMFG2RD			UNV				RD		S3		LD	
PMFG2RD NSF Food Zone ²			UNV 120 - 277 VAC		CRI83 83 CRI CRI90 90 CRI		RD Red		S3 Stainless Steel Complete		LD Dimming 0-10V	
	2 2 FT 4 4 FT			27K 2700K ³ 3K 3000K 35K 3500K 4K 4000K 5K 5000K								
	G0 1" (15/16") Standard G1 1 1/2" T-Bar G2 2" T-Bar									L4 0.140 50% DR Ext. Prismatic Acrylic (P20) L5 0.118 StarFrost® Acrylic (base) L9 0.187 Tempered Glass (P62) ⁴		
						2 FT 4 FT		2 FT 4 FT				
						35L 3500 lm (31W) 70L 7000 lm (61W) 76L 7600 lm (66W) 151L 15100 lm (131W)		08L 849 lm (25W) 17L 1699 lm (50W) 08L 849 lm (25W) 17L 1699 lm (50W)			BBU 10W Battery Backup, Integral BBU1 12W Battery Backup, Integral BBUR2 20W Battery Backup, Remote ⁵ F1 GLR/HLR Fusing (Fast) F2 GMF/HLR Fusing (Slow) IP65 IP Rated (Requires S6 Option) T3 Tamper Resistant (Hex w/pin or other) V1 External Gasketing	
						Selection must match the selected length		Selection must match the selected length				

Footnotes:

² NSF Food Zone luminaires (PMF prefix) come in DIRECT CONTACT with food

³ Only 90 CRI

⁴ Only Available with Stainless Steel Lens Frame



⁵ The 20W Battery Backup Remote powers a minimum of 3 luminaires and must be mounted on the outside of the luminaire or in a remote dry/damp location.

CONTACT FACTORY FOR DIFFERENT WAVELENGTHS,
SPECTRUMS, OR DUAL CIRCUITING INFORMATION.

G2RD Series

PHOTOMETRICS

Relative Spectral Power Distribution

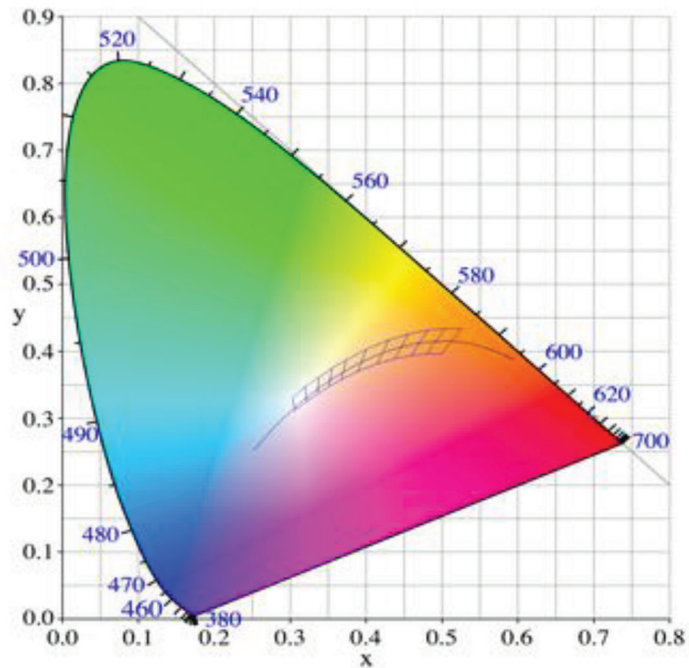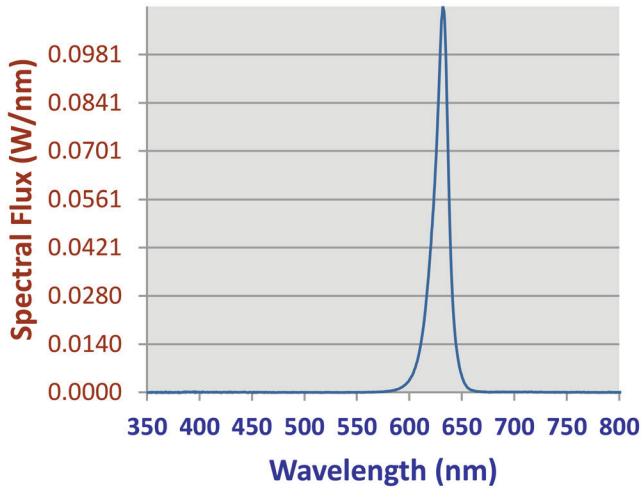

VIVARIUM RED	
Peak Wavelength	Dominant Wavelength
632.2	622