

MS

Garage & Canopy Lite

GRL13RO Motion Sensor & Remote Control



APPLICATIONS:

- Garage & Canopy

FEATURES:

- Slim Low-Profile Sensor
- Dims light from high to low
- Microwave Sensing Technology
- Enable Motion Sensor with the handheld Wireless IR Remote Control
- Designed for GCL13RO Luminaire

SPECIFICATIONS

MOUNTING HEIGHT:

40FT Max

SENSOR DETECTION RADIUS:

20%, 50%, 75%, 100% (3.2FT – 26.2FT)

TIME SETTING:

10 seconds, 1, 5, 10, 15, 20, 30, or 60 minutes

LIGHT CONTROL:

24H, 10, 30, or 50 LUX

TESTING & RATINGS:

IP65 Ingress protection

OPERATING TEMPERATURE:

-4°F to 140°F (-20°C to 60°C)

ELECTRICAL:

12 – 24 VDC, <50 mA Power Supply


<0.2 mW Transmission Power

5.8 GHz, 75 MHz HF System


0-10V Max, 25 mA sinking current Dimming Control

MOUNTING:

Mounts inside the bottom of the GCL13RO Luminaire




TOP VIEW



SIDE VIEW

SENSOR COVERAGE

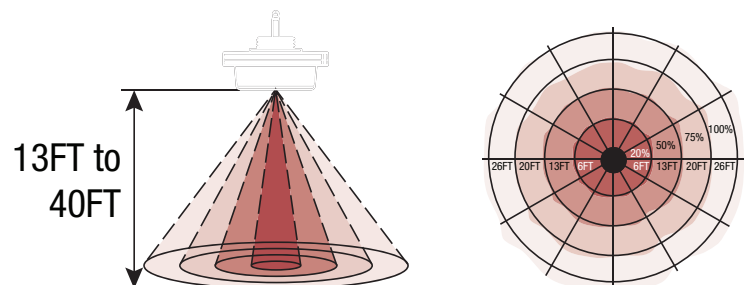

Motion Sensor with Remote Control