



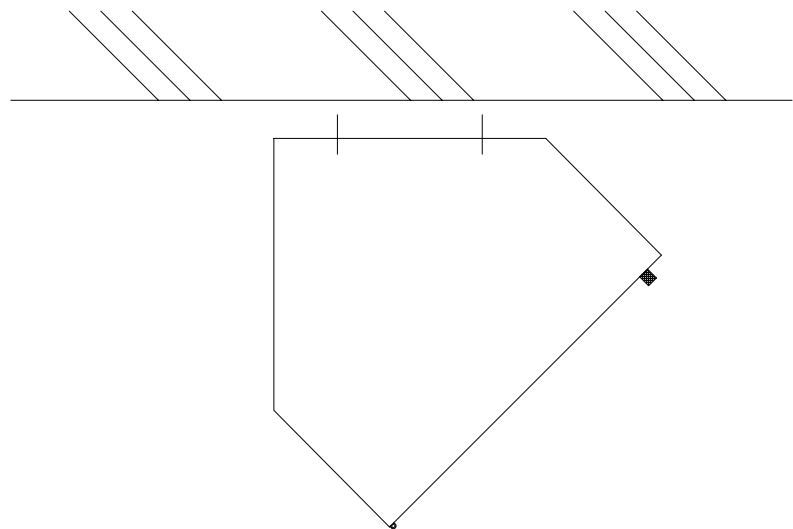

SUGGESTED MOUNTING FOR PERIMETER LITES

Series P1, P2

1. Open luminaire by loosening the two thumb screws securing the lens frame to the housing.
2. Remove the reflector by turning four reflector latches 1/4 turn each. *(Note: If desired, the lens frame can be removed from the housing by removing four 10-24 nuts securing the lens frame to the housing.)*
3. Mount the luminaire to the ceiling (or wall) as required by utilizing the four mounting holes provided.
4. Remove the cardboard lampholder guard and make all necessary wiring connections.
5. Replace the reflector, secure in place, lamp the luminaire with the proper lamp, re-attach the lens frame assembly if removed, close lens frame.

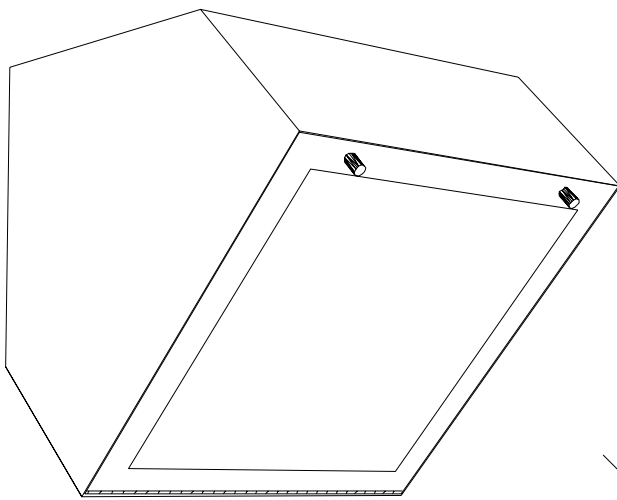

Cleaning Instructions: Wipe luminaire with a soft cloth slightly dampened with warm, soapy water. On stainless steel units, tightly adhering deposits may be removed by using a stainless steel polishing powder. Never use steel wool or steel brushes on stainless steel. Always rub in the directions of the polish lines.

Note: All luminaires to be installed by a qualified electrician.
Mounting and electrical hardware not supplied by Paramount Industries unless otherwise noted.