



GENERAL:


1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
4. All luminaires to be installed by a qualified electrician.

NOTE: *The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.*

INSTALLATION

1. Lightly pry lens away from housing starting at one end, then remove lens by pulling firmly.
2. Remove LED mounting plate by removing screws and disconnecting arrays from driver.
3. Mount luminaire utilizing 2 mounting holes. Luminaire can be direct surface mounted to ceiling or suspended.
4. Make all necessary wiring connections. Refer to wiring diagram on driver for proper connection.
5. Re-connect arrays to driver, attach LED mounting plate and replace lens.

** Fixture intended for Dry/Damp location.*

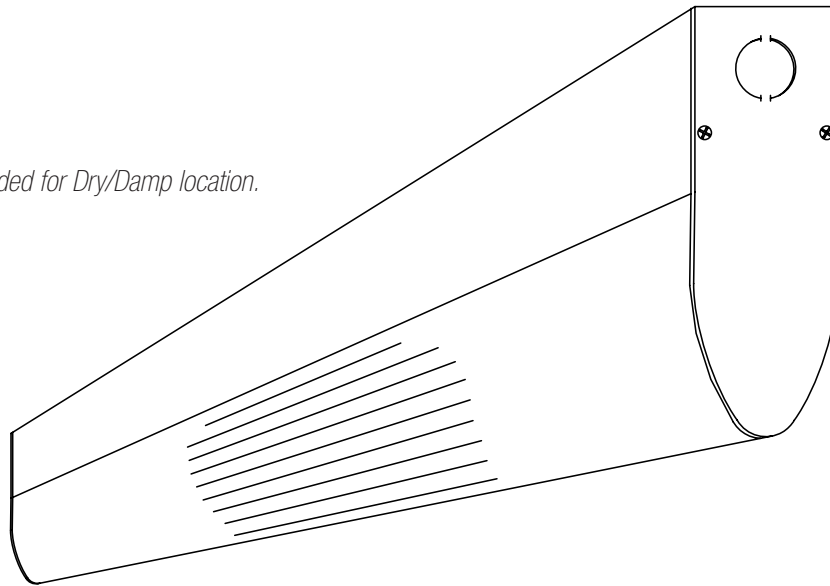

Cleaning Instructions: Wipe luminaire with a soft cloth slightly dampened with warm, soapy water. On stainless steel units, tightly adhering deposits may be removed by using a stainless steel polishing powder. Never use steel wool or steel brushes on stainless steel. Always rub in the direction of the polish lines.

Mounting and electrical hardware not supplied by Paramount Industries unless otherwise noted.

iiPMA1